

The operating status conditions of the printer and the amounts of inks used can be monitored remotely. PICT allows you to do other work during printing, helping you to perform operations in a planned manner.

You can also schedule maintenance and preparation for ink refilling in advance.



■Software



Combination of upgraded usability and functionality Improves reproducibility of special effects (such as transparency)

 $\underline{\underline{{\rm I\hspace{-.07cm} I}}}$ Increases RIP processing speed of PDF data by 25% on average Prints out the variable data by Variable print function Displays frequently used setting and pop-up windows

■ Specifications		CJV200-160	CJV200-130	CJV200-75		
		CHICAGO TEST	C 13/200-19	Maning		
Item						
Print head		On-demand piezo print head (single)				
Print resolution		X:600, 1200dpi Y:600, 900, 1200dpi				
Head gap		2levels by manual (1.5mm / 2.0mm)				
lnk	Туре	SS21, SS22, BS4				
	Color	4color(C,M,Y,K) 8color(C,M,Y,K,Lc,Lm,Lk,Or)				
	Capacity	440ml				
Ink circulation		Yes				
Max.Load capacity		1620mm(63.8in)	1371mm(54in)	810mm(31.9in)		
Max.Printable width		1610mm(63.4in)	1361mm(53.5in)	800mm (31.5in)		
Media roll outer diameter		ϕ 180mm or less (7.1in)				
Media roll weight		25kg (55.1 lb.) or less				
Media roll inside diameter		2 / 3 inch				
Cut function	Cut speed / acceleration	Speed:Max,300 mm/s Acceleration:Max, 0.5G				
	Cut pressure	10-450gf				
	Cutter response times	10 times / sec				
	Repeatability	±0.2 mm (Excluding expansion and contraction of film due to temperature)				
Interface		Ethernet 1000 BASE-TT(Recommended) / USB 2.0 Hi-speed				
Power		AC(100~120V/200~240V±10%)×2 50/60Hz±1Hz				
Power consump	tion	Max.1320W x2 / 4.5W or less (Sleep mode)				
Operational	Temperature	20 - 30 degC (68-86 degF)				
environment	Humidity	35 - 65% Rh (Non condensing)				
	Guaranteed accuracy temperature	20 - 25 degC (68 - 77 degF)				
	Dust level	Equivalent to general office				
Dimensions (WxDxH)		2,770mm × 748mm × 1,370mm (109 x 29 x 54 in)	2,520mm × 748mm × 1,370mm (99 x 29 x 54 in)	1,960mm × 748mm × 1,370mm (77 x 29 x 54 in)		
Weight		140kg(309lb)	130kg(287lb)	105kg(231lb)		

Item	Color	Item No.	Remarks	
	Cyan	BS4-C-60	OPT-J0361 ECO CASE 4 is required for setup *2L ink pack is also available OPT-J0364 MBIS3 is required for setup	
BS4	Magenta	BS4-M-60		
600ml Ink Pack	Yellow	BS4-Y-60		
	Black	BS4-K-60		
	Cyan	SS22-C-44	*1L ink pack is also available OPT-J0364 MBIS3 is required for setup	
	Magenta	SS22-M-44		
	Yellow	SS22-Y-44		
SS22	Black	SS22-K-44		
440ml Cartridge	Light Cyan	SS22-LC-44		
	Light Magenta	SS22-LM-44		
	Orange	SS22-OR-44		
	Light Black	SS22-LK-44		
	Cyan	SPC-0501C	*2L ink pack is also available OPT-J0364 MBIS3 is required for setup	
	Magenta	SPC-0501M		
SS21	Yellow	SPC-0501Y		
440ml Cartridge	Black	SPC-0501K		
*Scheduled for support in March 2025	Light Cyan	SPC-0501LC		
III IVIAI CII 2025	Light Magenta	SPC-0501LM		
	Orange	SPC-05010r		
	Light Black	SPC-05011 k		

■Options

Item No.	ltem	Image
OPT-J0422	NCU OPT	
OPT-J0364	MBIS3 bulk supply unit	7
OPT-J0576	MBIS BKT OPT	
OPT-J0502	Level foot OPT	St.
OPT-J0578	160 cover OPT	10.00
OPT-J0579	130 cover OPT	- I
OPT-J0580	75 cover OPT	1
OPT-J0361	ECO CASE4	

•Some examples shown in this catalog are artificial renderings. • Specifications, designs and dimensions shown in this catalog may be subject to change without notice for technical improvements. •The corporate and merchandise names in this catalog are the trademarks or registered trademarks of the respective corporations. •Inkjet printers use extremely fine dots, so colors may vary slightly after replacement of print heads. •Also note that when using multiple printer units, colors could vary slightly from one unit to another due to slight individual differences. •Please note that descriptions and data in this catalog are as of September 2024

DB10386-01



2182-3 Shigeno-Otsu, Tomi-city, Nagano 389-0512, Japan TEL:+81-268-64-2281

Mimaki Global Network

Vietnam MIMAKI VIETNAM CO., LTD.

MIMAKI USA, INC. MIMAKI BRASIL COMERCIO E IMPORTAÇÃO LTDA MIMAKI INDIA PRIVATE LIMITED MIMAKI ENGINEERING (TAIWAN) CO.,LTD. Singapore MIMAKI SINGAPORE PTE. LTD.

MIMAKI EUROPE B.V. Indonesia PT. MIMAKI INDONESIA SHANGHAI MIMAKI TRADING CO.,LTD. MIMAKI (THAILAND) CO.,LTD.





In Pursuit of

High Image Quality and Ease of Use for Everyone













Overwhelming **Beauty**

The CJV200 is equipped with a single print head of "330 Engine" in Mimaki's flagship printer.

The technology of precise control of a minimum 3pl ink drop and the print head that delivers high-density

prints, even at high speeds, resulting in overwhelmingly beautiful printing. 330




Simple Design

Single Print Head

- Simple Maintenance

Single print head system contributes less cleaning time and adjustment time. The simple design allows you to work quickly and easily.



Up-Facing Control Panel for Easy View



Reliable Productivity

even during Peak Season

High Quality

USIC FESTIVAL

Reduce Ink Consumption with Just 2 Clicks Ink Saving Function

Anyone can easily reduce ink consumption without technical expertise. This function is available with


any media and profiles.

②Select reduction level

Automatic Set Up

Easy and Precise

Automatically performs necessary adjustment at the media setup to ensure optimal image quality at all times. (DAS | Dot Adjustment System)



Simple Design Software

Simple & reate

SimpleCreate is software that allows you to create labels, POP, stickers, and other designs without a need of DTP software. It provides simple tools for creating designs and cutlines, as well as direct output from the software.




5-level adjustment from level 1 to level 5





Ink Saving Level 3



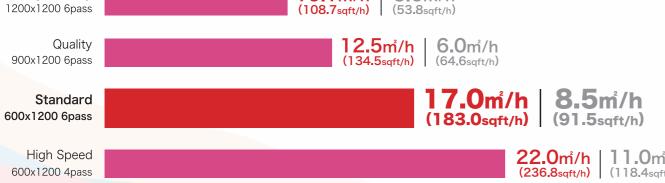

10.1m/h

5.0m/h

CJV200-160 print speed

■4 Color ■8 Color









